


Ton bag bagging machine is also known as jambo bag packing machine, it is widely used for the packing solution for wood pellets, feed pellets, fertilizer pellets, industrial material granular and powder material.

Material go to weighing device from hopper, the weighing device is controlled by electric panel, it can weight the material to a presetting value with high accuracy, the bag clamp system can automatic unclamp the ton bag after the material fill into bag, the conveyor under the machine can move the bag away.

The weighing system apply fast add, medium add and slow add three step to get the presetting weight value, thus to make sure the weighing accuracy.

Easy to set the weighing value from electric panel.

Manually put bag to bag clamp device

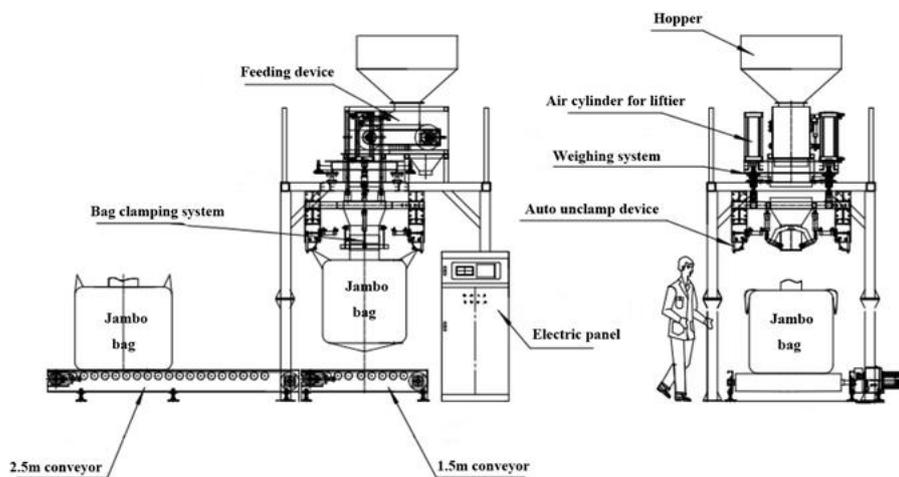

Ton bag bagging machine drawing

Ton bag bagging machine technical data

Model	JT-1000
Weighting range	100-2000Kg
Feeding motor power	1.5 Kw
Voltage	AC380V/220V,50Hz or customized
Compressed air pressure	0.6Mpa
Compressed air consumption	0.08m ³ /min
Error	±0.2%
Packing speed	10-40 bags per hour
Bag size	1100x1100x1100mm
Bags inlet size	Φ400mm
Gallus of bags	Four gallus 400mm length

Main body dimension	2000x2000x4400mm
Conveyor width	1400mm
Conveyor length	4000mm
Conveyor power	1.5+2.2Kw
Working temperature	-20℃~+40℃
Bags sealing method	Manually sealing

